

## DESCRIPTION:

The F3A denotes a range of SENIS Magnetic Field-to-Voltage Transducers with fully integrated 3-axis Hall Probe.

The Hall Probe contains a CMOS integrated circuit, which incorporates three groups of mutually orthogonal Hall elements, biasing circuits, amplifiers, and a temperature sensor. The integrated Hall elements occupy very small area ( $150\mu\text{m} \times 150\mu\text{m}$ ), which provides very high spatial resolution of the probe. The CMOS IC technology enables very high precision in the fabrication of the vertical and horizontal Hall elements, which gives high angular accuracy (orthogonality error  $< 0.1^\circ$ ) of the three measurement axis of the probe. The application of the spinning-current technique in the biasing of the Hall elements suppresses the planar Hall effect. The on-chip signal pre-processing enables a very high frequency bandwidth (DC to 25 kHz) of the probe; and on-chip signal amplification provides high output signals of the Hall probe, which makes the transducer immune to electromagnetic disturbances.

The Hall probe is connected with an electronic box (Module E in Fig. 1). The Module E provides biasing for the Hall probe and additional conditioning of the Hall probe output signals: amplification, linearization, canceling offset, compensation of the temperature variations, and limitation of the frequency bandwidth.

The outputs of the F3A Magnetic Transducers are available at the connector CoS of the Module E: these are high-level differential voltages proportional with each of the measured components of a magnetic flux density; and a ground-referred voltage proportional with the probe temperature.

## KEY FEATURES:

- **Fully integrated CMOS 3-axis (Bx, By, Bz) Hall Probe, of which one, two, or three channels are used**
- **Very high spatial resolution (By:  $0.03 \times 0.005 \times 0.03\text{mm}^3$ ; Bx and Bz:  $0.15 \times 0.01 \times 0.15\text{mm}^3$ )**
- **High angular accuracy (orthogonality error less than  $0.1^\circ$ )**
- **Virtually no planar Hall effect**
- **High frequency bandwidth (from DC up to 25kHz)**
- **High disturbance immunity**
- **Negligible inductive loops on the Probe**
- **Integrated temperature sensor on the probe for temperature compensation**

## TYPICAL APPLICATIONS:

- Characterization and quality control of permanent magnets
- Development of magnet systems
- Mapping magnetic field
- Quality control and monitoring of magnet systems (generators, motors, etc.)
- Application in laboratories and in production lines

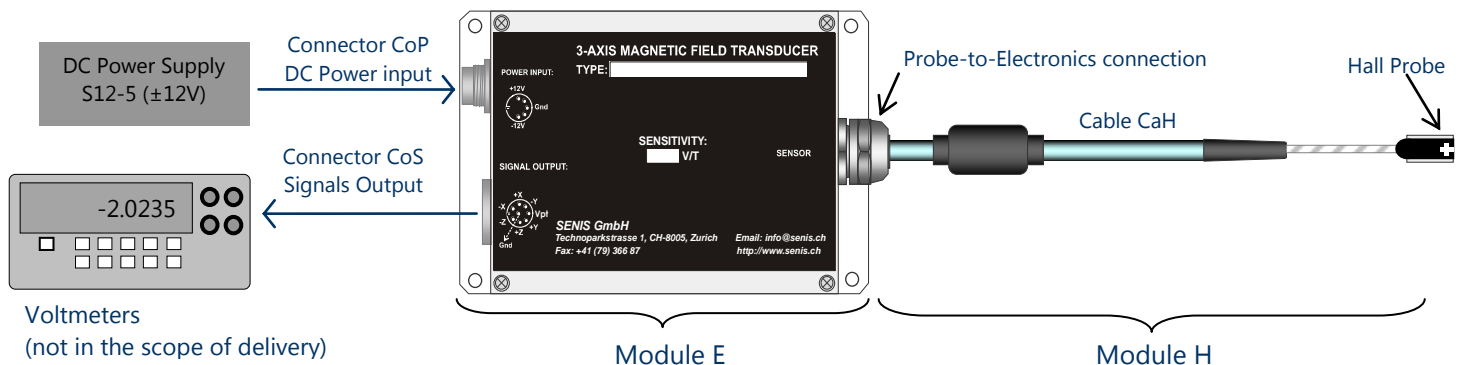












Figure 1. **Typical measurement setup with a SENIS magnetic-field-to-voltage transducer with fully integrated Hall Probe (Module H) and Electronic (Module E)**



Figure 2. Photo of a 3-axis magnetic field transducer with fully integrated Hall Probe

### SPECIFICATIONS (Module H):

A number of different geometries/dimensions of Hall probes available that fulfill a wide range of application requirements:

									
<b>A</b> <sup>1)</sup>	<b>B</b> <sup>2)</sup>	<b>C</b> <sup>1)</sup>	<b>D</b> <sup>3)</sup>	<b>E</b> <sup>4)</sup>	<b>G</b> <sup>5)</sup>	<b>H</b> <sup>6)</sup>	<b>K</b> <sup>5)</sup>	<b>L</b> <sup>5)</sup>	<b>U</b> <sup>5)</sup>
16.5x5.0x2.3	16.5x4.0x2.3	8.0x4.0x0.9	16.5x5.0x2.3	14.5x5.0x2.0	42.0x2.0x0.5	42.0x2.0x1.1	47.0x2.0x0.5	5.8x2.0x0.5	8.0x3.0x0.25

### REMARKS:

- 1) Very robust standard package;
- 2) The package includes two gutters allowing the fixing of the Probe in the corresponding Probe Holder;
- 3) The mechanical package includes a transparent window (diam. 1.5 mm) over the Hall elements integrated on the Hall probe IC die;
- 4) The Probe has a thin sensitive part, which is a naked silicon chip (dim. 3 mm x 0.64 mm x 0.3 mm). Caution: the naked silicon die is fragile.
- 5) Very thin and long Probes with naked silicon chip. Caution: the naked silicon die is fragile.
- 6) Very thin and long Probes with protected silicon chip. Caution: the naked silicon die is fragile.

The sensor chip is embedded in the probe package and connected to the CaH cable.

**PROBE A DIMENSIONS AND CHARACTERISTICS:**


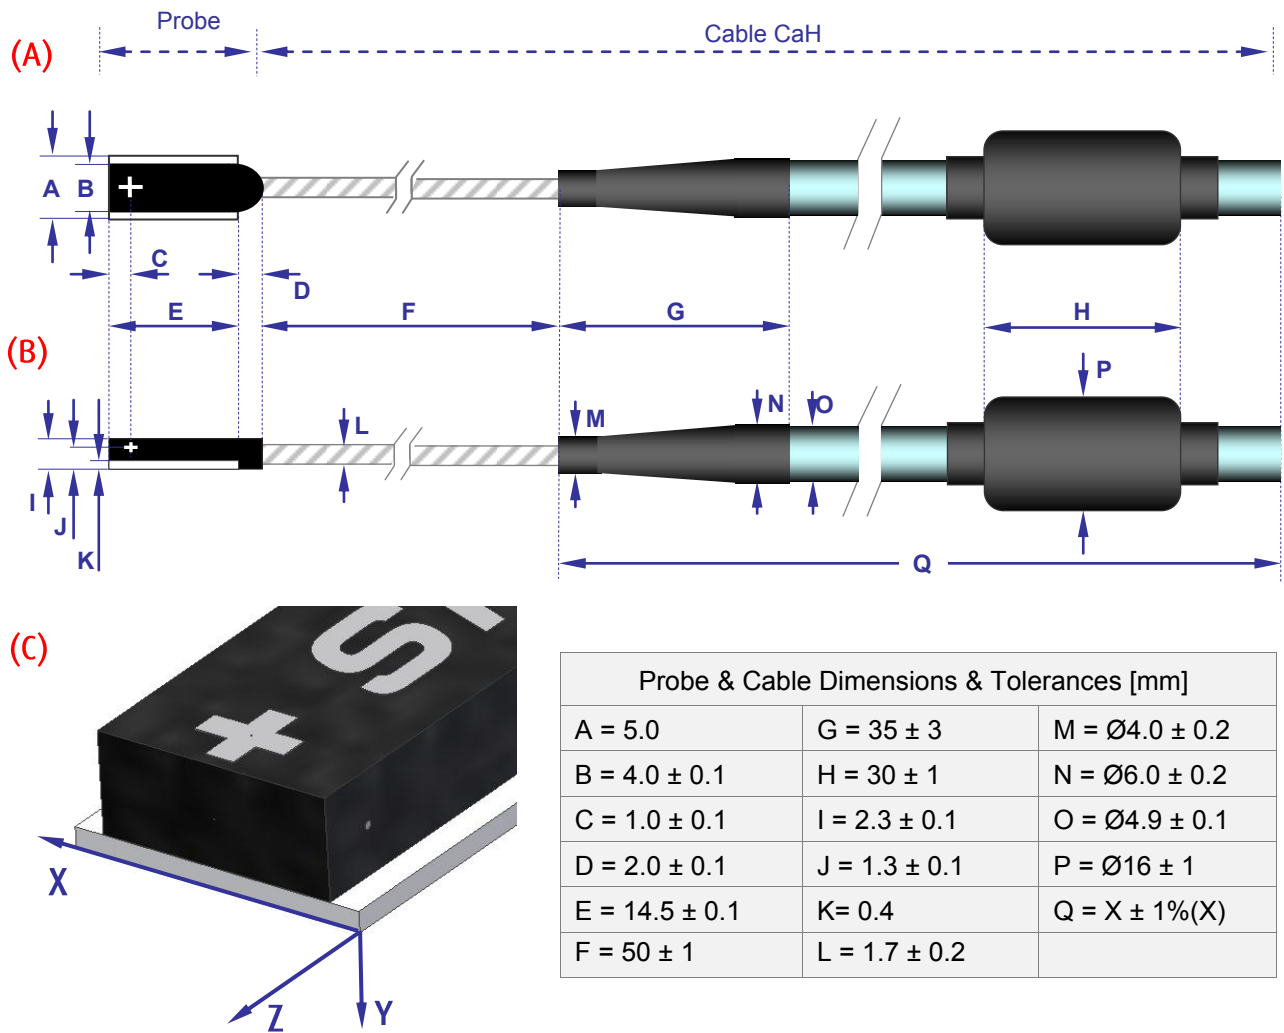


Figure 1. Dimensions of A Hall probe and cable: (A) Top view; (B) Side view; (C) Isometric view with a reference Cartesian coordinate system of the probe head. Magnetic Field Sensitive Point (MFSP) is marked with the white cross.

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic Field sensitive volume (MFSV):	0.15	0.01	0.15
Position of the center of MFSV: (corresponding to MFSP, see Fig.1)	2.5 ± 0.1	-1.3 ± 0.1	-1.0 ± 0.1
Total Probe external dimensions:	5.0 (ref. ceramics) 4.0 ± 0.1 (Probe head)	2.3 ± 0.1	16.5 ± 0.1
Angular accuracy of the axes:	± 0.5° with respect to the reference surface		
CaH Cable:	Shielded, with a flexible thin part near the probe and ferrite sleeve on the thicker part (see Fig. 1)		
Total length of the CaH cable:	<ul style="list-style-type: none"> <li>Standard: 2 m (example of Probe notation: <b>03A02</b>)</li> <li>Optional: XX m (example of Probe notation: <b>03Axx</b>)</li> </ul> <i>Different cable lengths are available upon request.</i>		

**PROBE B DIMENSIONS AND CHARACTERISTICS:**

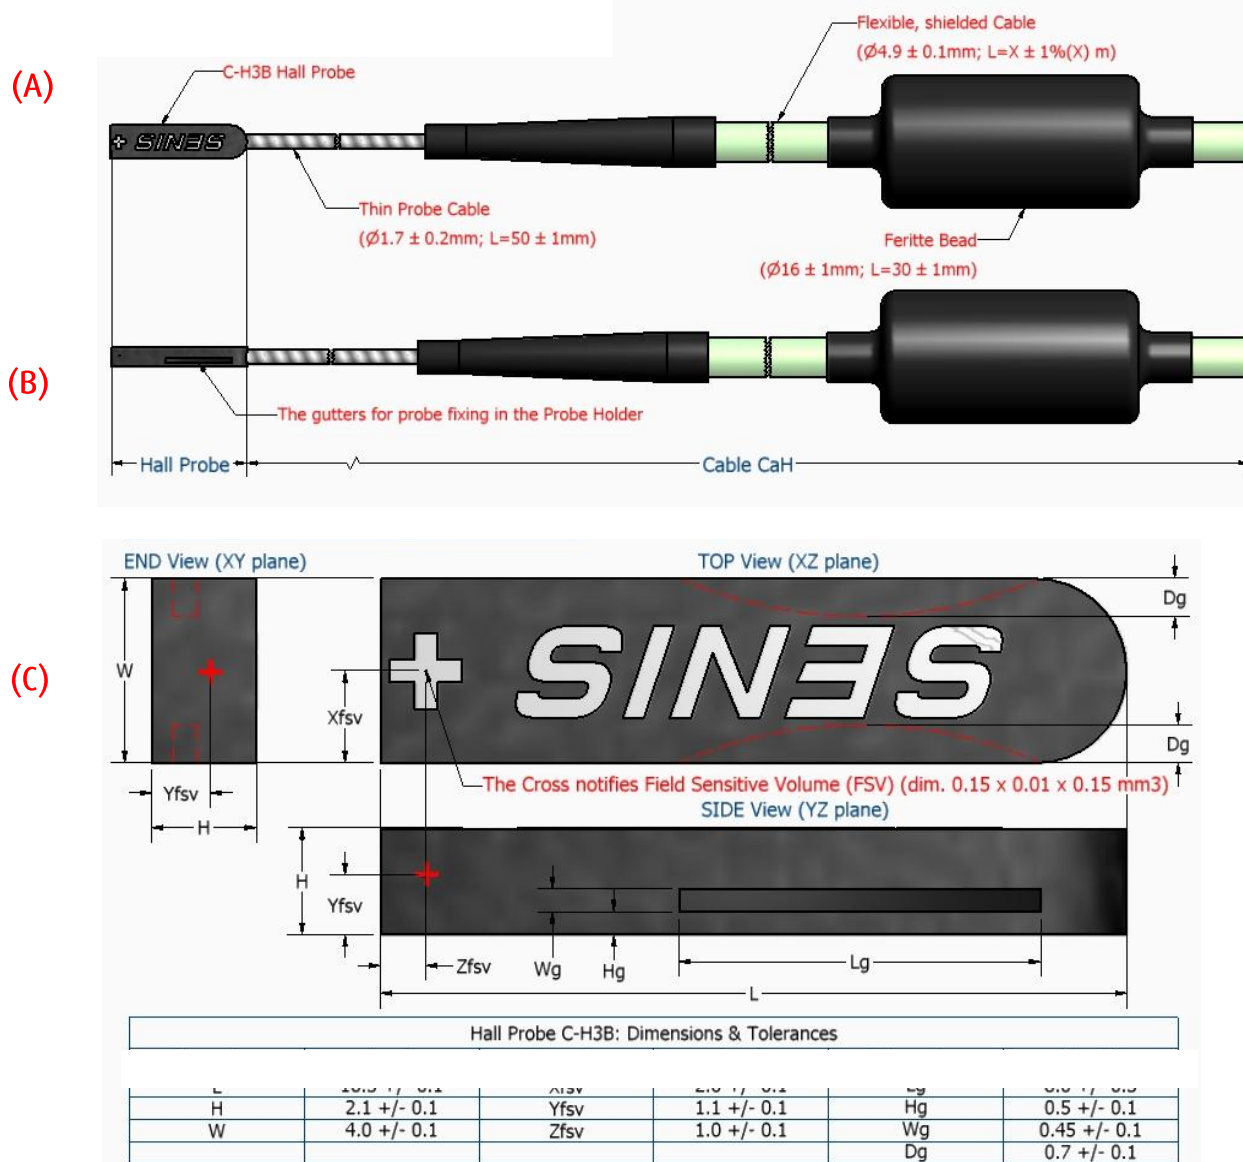

**Figure 1. Dimensions of B Hall probe and cable: (A) Top view; (B) Side view; (C) Isometric view with reference Cartesian coordinate system of the probe head. Magnetic Field Sensitive Point (MFSP) is marked with the white cross.**

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic Field sensitive volume (MFSV):	0.15	0.01	0.15
Position of the center of MFSV: (corresponding to MFSP, see	2.0 ± 0.1	-1.1 ± 0.1	-1.0 ± 0.1
Total Probe external dimensions:	4.0 ± 0.1	2.1 ± 0.1	16.5 ± 0.1
Angular accuracy of the axes:	± 0.5° with respect to the reference surface		
CaH Cable:	Shielded, with a flexible thin part near the probe and ferrite sleeve on the thicker part (see Fig. 3)		
Total length of the CaH cable:	<ul style="list-style-type: none"> <li>Standard: <b>2 m</b> (example of Probe notation: <b>03B02</b>)</li> <li>Optional: <b>XX m</b> (example of Probe notation: <b>03Bxx</b>)</li> </ul> <i>Different cable lengths are available upon request.</i>		

PROBE C AND CABLE DIMENSIONS AND CHARACTERISTICS

TOP VIEW:

FRONT VIEW:

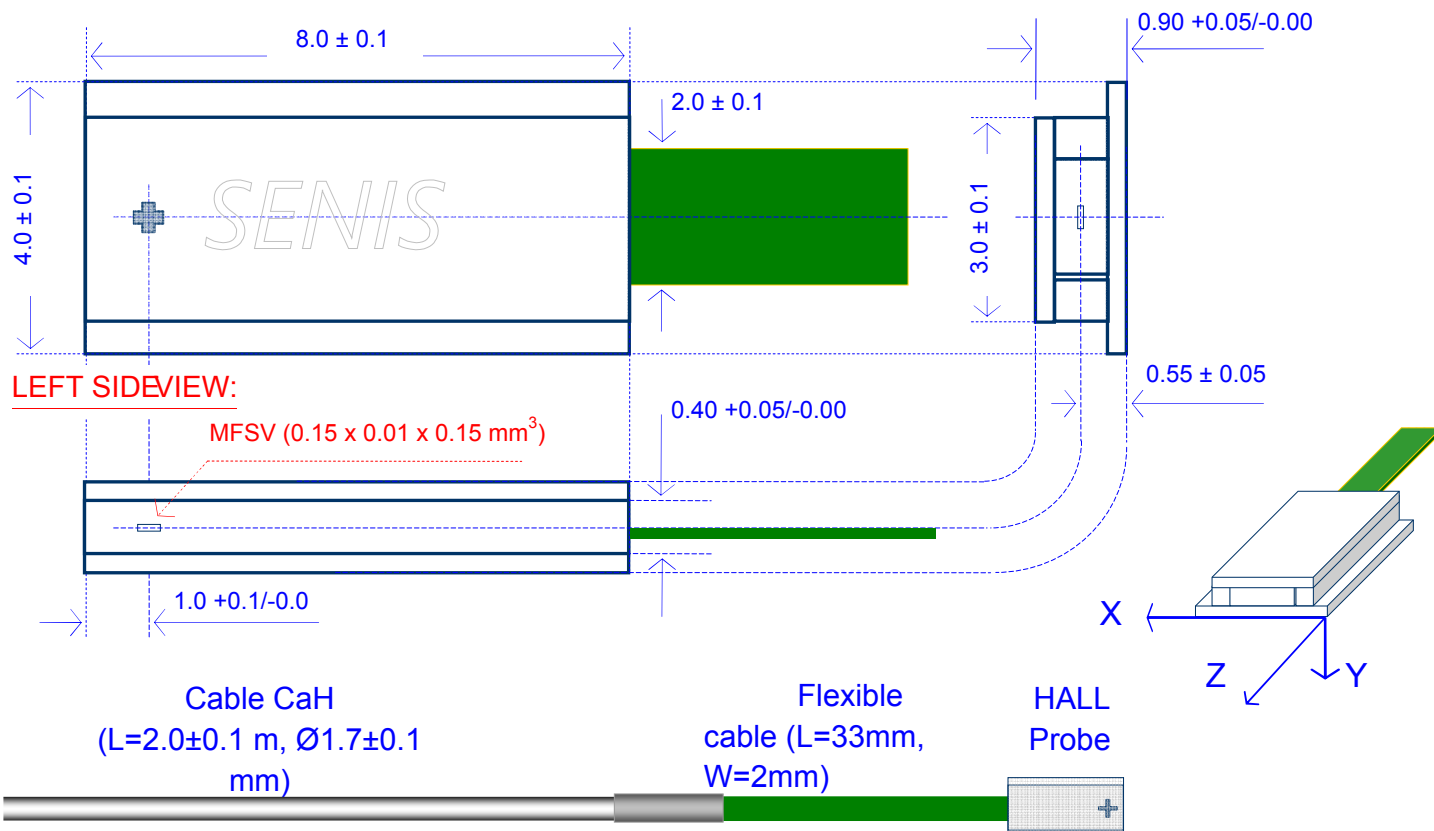


Figure 1. Dimensions of the standard F3A-03C02C Hall probe and cable CaH (Module H)

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic field sensitive volume (MFSV)	0.15	0.01	0.15
Position of the center of MFSV (corresponding to FSP, see Figures 2 and 3)	2.0 ± 0.1	-0.55 ± 0.05	-1.0 ± 0.1
Total Probe external dimensions	4.0 ± 0.1	0.90 +0.05/-0.00	8.0 ± 0.1
Angular accuracy of the axes	± 0.5° with respect to the reference surface		
CaH Cable (construction and characteristics)	Conductor: Silver plated soft copper core, 7 x 44 AWG		
	Insulation: PFA (Perfluoro Alkoxy), diameter 0.30 mm		
	Twisting: 15 x Diameter		
	Shield: Silver plated soft copper braid		
	Jacket: PFA (Perfluoro Alkoxy)		
	Service temperature: -196 / +200 °C		
	Linear resistance: 1.4 J/m		
	Rated voltage: 150 Vac		
Total length of the CaH cable:	RoHS compliance: Yes		
	Standard: 2 m (Probe notation: 03C02)		
	Optional: XX m (Probe notation: 03CXX)		
NOTE: Various cable lengths are available upon request.			

**PROBE D DIMENSIONS AND CHARACTERISTICS:**

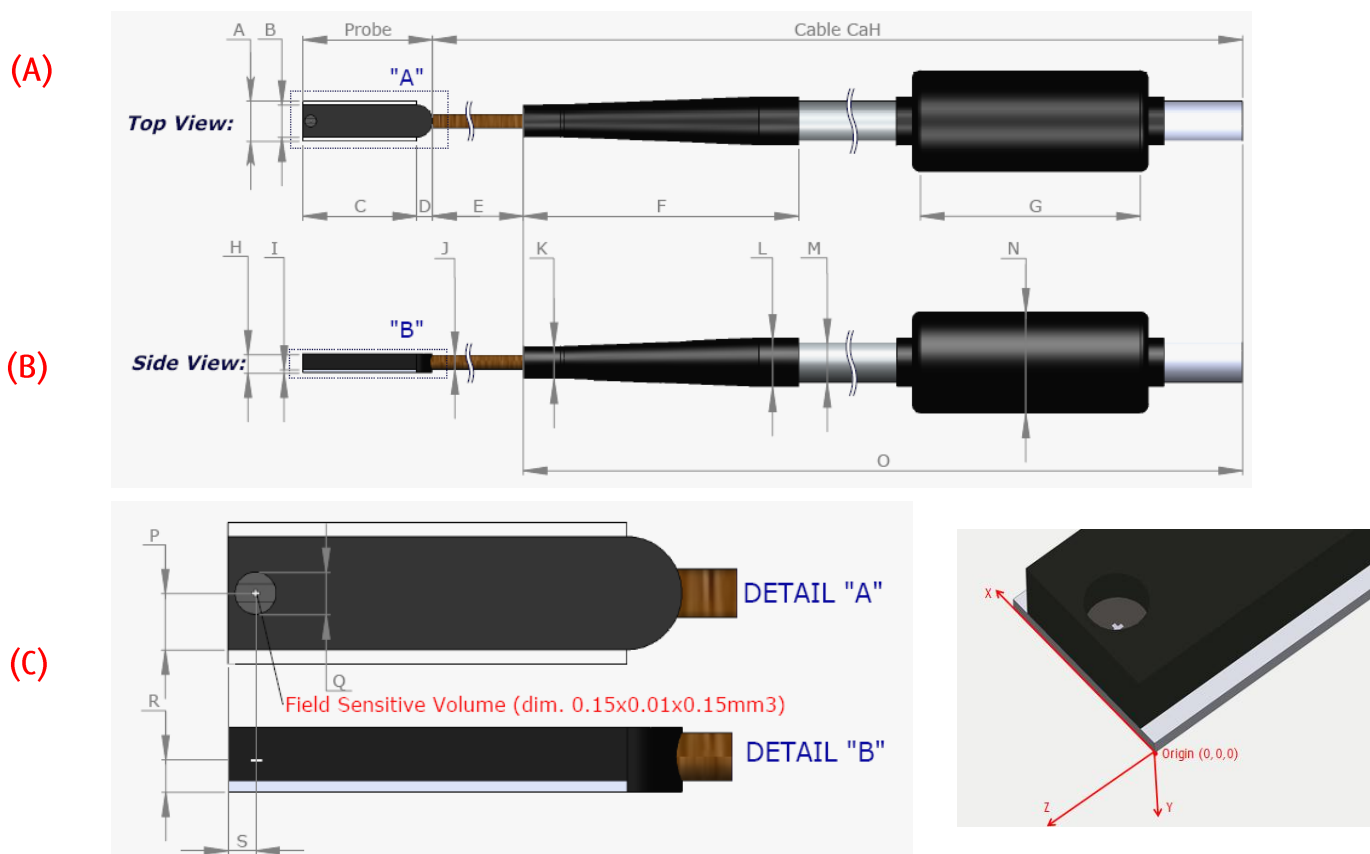





Figure 1. Dimensions of D Hall probe and cable: (A) Top view; (B) Side view; (C) Isometric view with reference Cartesian coordinate system of the probe head. Magnetic Field Sensitive Point (MFSP) is marked with a transparent window.

**Probe & Cable Dimensions & Tolerances [mm]**

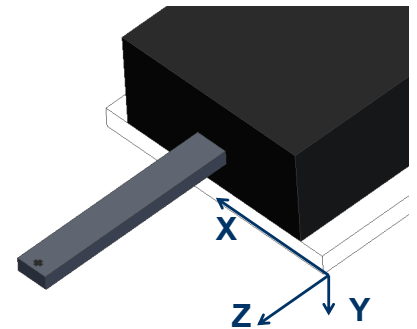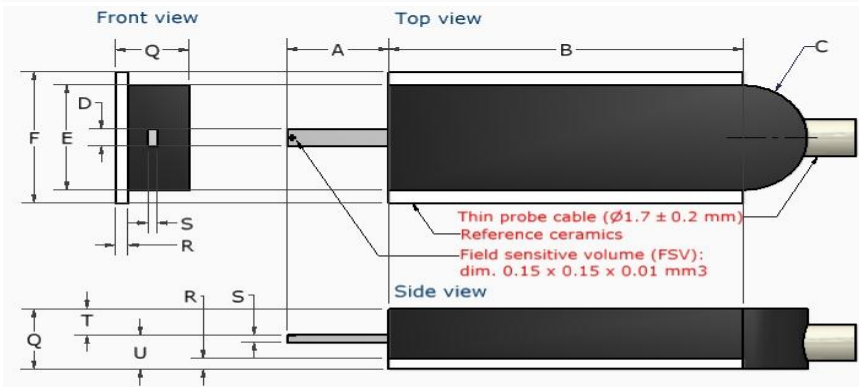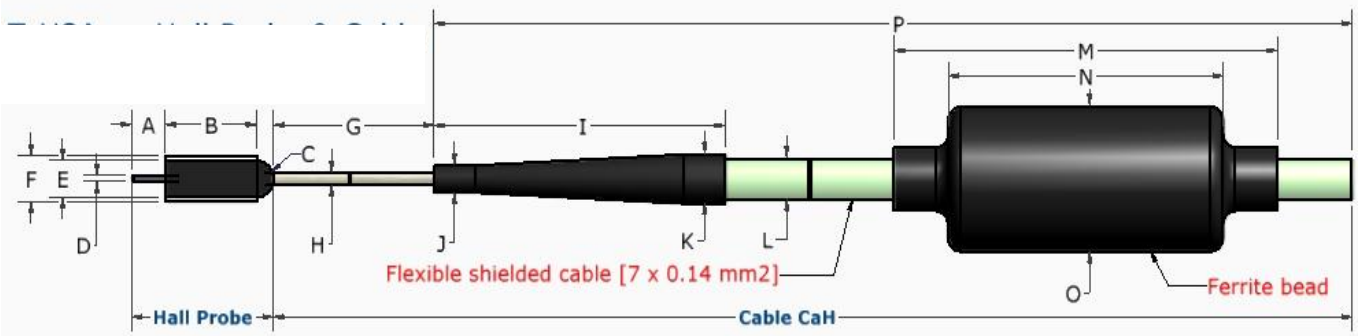A	5.0	F	35 ± 3	K	Ø 3.8 ± 0.2	P	2.0 ± 0.1
B	4.0 ± 0.1	G	30 ± 1	L	Ø 6.0 ± 0.2	Q	Ø 1.5 ± 0.2
C	14.5 ± 0.1	H	2.3 ± 0.1	M	Ø 4.9 ± 0.1	R	1.3 ± 0.1
D	2.0 ± 0.1	I	0.4	N	Ø 16 ± 1	S	1.0 ± 0.1
E	1500 ± 25	J	1.7 ± 0.2	O	X ± 1%(X) <sup>1)</sup>		

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic Field sensitive volume (MFSV):	0.15	0.01	0.15
Position of the center of MFSV: (corresponding to MFSP, see	2.5 ± 0.1	-1.3 ± 0.1	-1.0 ± 0.1
	5.0 (ref. ceramics)		
Total Probe external dimensions:	4.0 ± 0.1 (Probe head)	2.3 ± 0.1	16.5 ± 0.2
Angular accuracy of the axes:	± 0.5° with respect to the reference surface		
CaH Cable:	Shielded, with a flexible thin part near the probe and ferrite sleeve on the thicker part (see Fig. 1)		
<sup>1)</sup> Total length of the CaH cable:	<ul style="list-style-type: none"> <li>Standard: 2 m (example of Probe notation: <b>03D02</b>)</li> <li>Optional: XX m (example of Probe notation: <b>03Dxx</b>)</li> </ul>		




**PROBE E DIMENSIONS AND CHARACTERISTICS:**



Dimension	[mm]	Dimension	[mm]	Dimension	[mm]
A	3.0 ± 0.1	H	1.7 ± 0.2	O	16 ± 1
B	11.0 ± 0.1	I	35 ± 3	P	XX ± 1%
C	R2.0 ± 0.1	J	4.0 ± 0.2	Q	2.2 ± 0.1
D	0.64	K	6.0 ± 0.2	R	0.4
E	4.0 ± 0.1	L	4.9 ± 0.1	S	0.28
F	5.0	M	50 ± 2	T	1.0 ± 0.1
G	50 ± 1	N	30 ± 1	U	1.2 ± 0.1

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic field sensitive volume (MFSV)	0.15	0.01	0.15
Position of the center of MFSV (corresponding to MFSP)	2.5 ± 0.1	-1.2 ± 0.1	2.85 ± 0.1
Total Probe external dimensions	• 0.64 - Probe tip (thinner part)	• 0.28 - Probe tip (thinner part)	• 3.0 ± 0.1 - Probe tip (thinner part)
	• 4.0 ± 0.1 / <u>5.0</u> - Longer, thicker part of the probe / <u>ref. ceramics</u>	• 2.2 ± 0.1 - Longer, thicker part of the probe	• 13.0 ± 0.2 - Longer, thicker part of the probe
Angular accuracy of the axes	± 0.5° with respect to the reference surface		
CaH Cable	Shielded, with a flexible thin part near the probe and a ferrite bead on the thicker part (see Fig. 1)		
Total length of the CaH cable:	• Standard: 2 m (Probe notation: 03E02) • Optional: XX m (Probe notation: 03Exx) Note: Different lengths are available upon request.		

**PROBE G DIMENSIONS AND CHARACTERISTICS:**

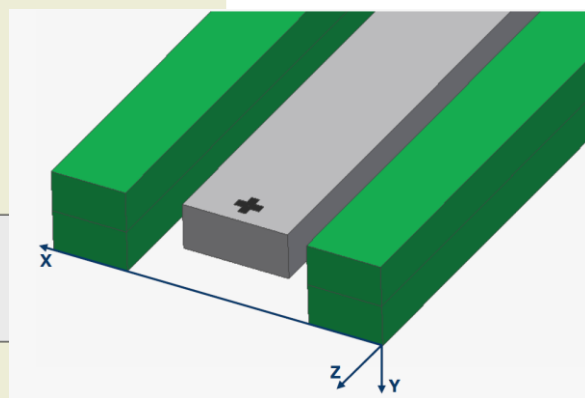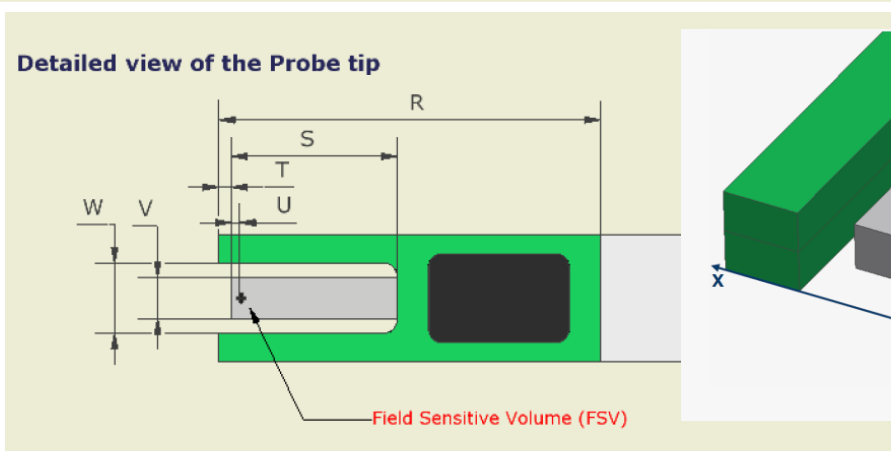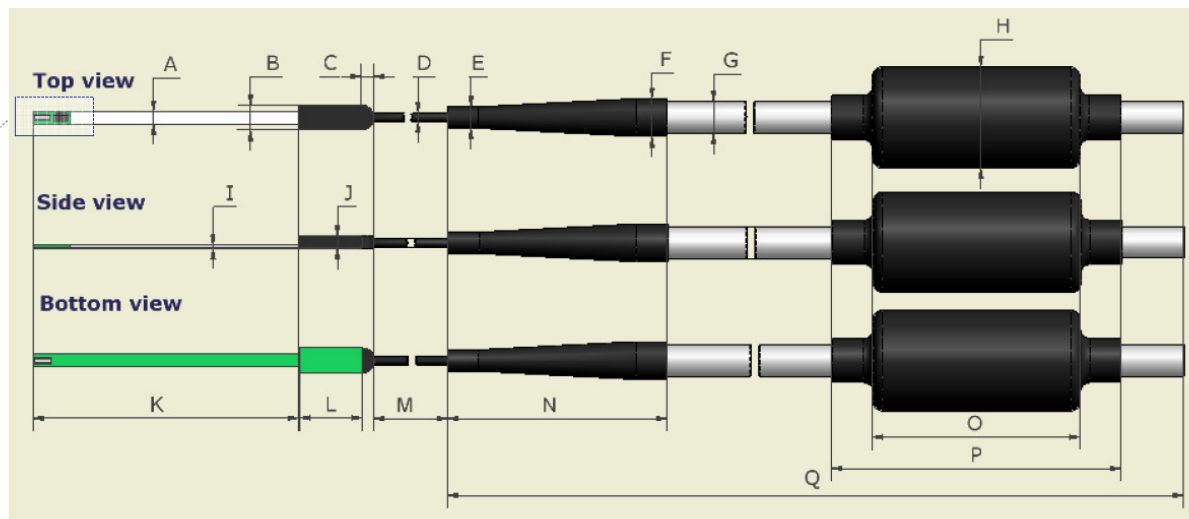


**Probe and Cable Dimensions & Tolerances**

Dimension	[mm]	Dimension	[mm]	Dimension	[mm]	Dimension	[mm]
A	$2.0 \pm 0.1$	G	$4.8 \pm 0.2$	M	$50 \pm 1$	S	$2.8 \pm 0.1$
B	$4.0 \pm 0.1$	H	$16 \pm 1$	N	$35 \pm 3$	T	$0.2 \pm 0.1$
C	$2.0 \pm 0.1$	I	$0.5 \pm 0.1$	O	$30 \pm 1$	U	0.15
D	$1.5 \pm 0.2$	J	$2.0 \pm 0.1$	P	$50 \pm 2$	V	0.64
E	$3.8 \pm 0.2$	K	$42.3 \pm 0.2$	Q	$XX \pm 1\%$ <sup>1)</sup>	W	$1.1 \pm 0.1$
F	$6.0 \pm 0.2$	L	$10.0 \pm 0.1$	R	$6.0 \pm 0.1$		

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic field sensitive volume (MFSV)	0.15	0.01	0.15
Position of the center of MFSV (corresponding to MFSP, see	$1.0 \pm 0.1$	$-0.4 \pm 0.05$	$-0.35 \pm 0.1$
	<ul style="list-style-type: none"> <li><math>2.0 \pm 0.1</math></li> <li>- Longer, thinner part</li> </ul>	<ul style="list-style-type: none"> <li><math>0.5 \pm 0.1</math></li> <li>- Longer, thinner part</li> </ul>	<ul style="list-style-type: none"> <li><math>42.3 \pm 0.2</math> Longer,</li> <li>- thinner part</li> </ul>
Total Probe external dimensions	<ul style="list-style-type: none"> <li><math>4.0 \pm 0.1</math></li> <li>Shorter, thicker part of the probe</li> </ul>	<ul style="list-style-type: none"> <li><math>2.0 \pm 0.1</math></li> <li>- Shorter, thicker part of the probe</li> </ul>	<ul style="list-style-type: none"> <li><math>12.0 \pm 0.1</math></li> <li>- Shorter, thicker part of the probe</li> </ul>
Angular accuracy of the axes	$\pm 0.5^\circ$ with respect to the reference surface		
CaH Cable	Shielded, with a flexible thin part near the probe		
Total length of the CaH cable:	<ul style="list-style-type: none"> <li>Standard: 2 m (Probe notation: <b>03G02</b>)</li> <li>Optional: xx m (Probe notation: <b>03Gxx</b>)</li> </ul>		
	<i>Note: Different lengths are available upon request.</i>		

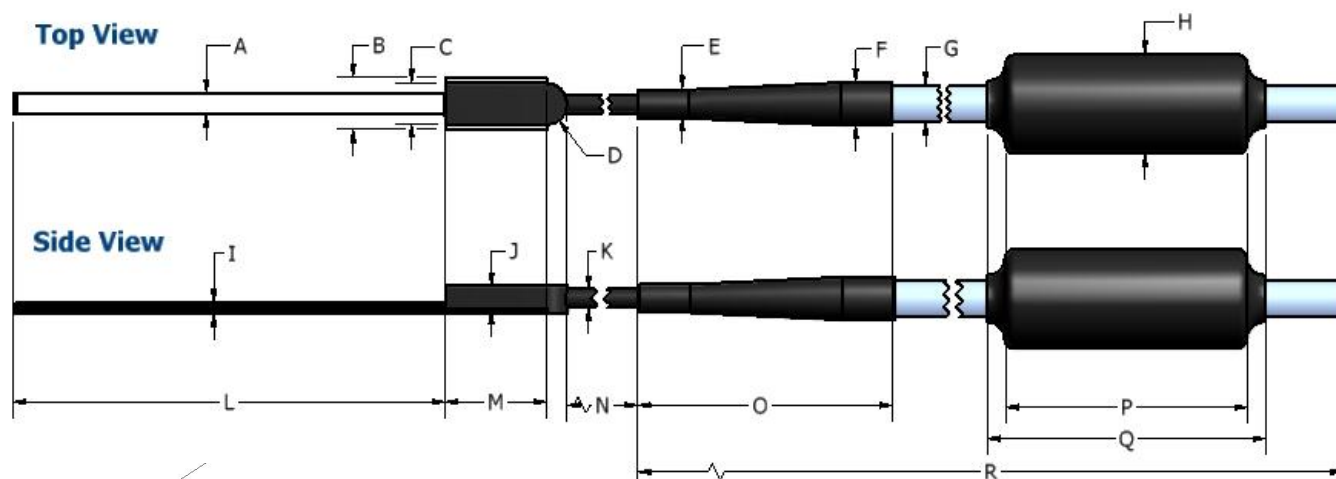
**PROBE H DIMENSIONS AND CHARACTERISTICS:**




Probe Dimensions & Tolerances					
Dimension	[mm]	Dimension	[mm]	Dimension	[mm]
A	2.0 +/- 0.1	G	4.8 +/- 0.2	M	10.0 +/- 0.1
B	5.0	H	16 +/- 1	N	50 +/- 1
C	4.0 +/- 0.1	I	1.1 +/- 0.1	O	35 +/- 3
D	R2.0 +/- 0.1	J	2.2 +/- 0.1	P	30 +/- 1
E	3.8 +/- 0.2	K	1.5 +/- 0.2	Q	50 +/- 2
F	6.0 +/- 0.2	L	42.3 +/- 0.2	R	XX +/- 1%

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic field sensitive volume (MFSV)	0.15	0.01	0.15
Position of the center of MFSV (corresponding to MFSP, see	1.0 ± 0.1	-0.6 ± 0.05	-0.6 ± 0.1
	<ul style="list-style-type: none"> <li>• 2.0 ± 0.1</li> <li>- Longer, thinner part</li> </ul>	<ul style="list-style-type: none"> <li>• 1.1 ± 0.1</li> <li>- Longer, thinner part</li> </ul>	<ul style="list-style-type: none"> <li>• 42.3 ± 0.2 Longer,</li> <li>- thinner part</li> </ul>
Total Probe external dimensions	<ul style="list-style-type: none"> <li>• 4.0 ± 0.1 / 0.5</li> <li>Shorter, thicker part of the probe / <u>ref. ceramics</u></li> </ul>	<ul style="list-style-type: none"> <li>• 2.0 ± 0.1</li> <li>- Shorter, thicker part of the probe</li> </ul>	<ul style="list-style-type: none"> <li>• 12.0 ± 0.1</li> <li>- Shorter, thicker part of the probe</li> </ul>
Angular accuracy of the axes	± 0.5° with respect to the reference surface		
CaH Cable	Shielded, with a flexible thin part near the probe		
Total length of the CaH cable:	<ul style="list-style-type: none"> <li>• Standard: 2 m (Probe notation: <b>03H02</b>)</li> <li>• Optional: xx m (Probe notation: <b>03Hxx</b>)</li> </ul> <p><i>Note: Different lengths are available upon request.</i></p>		

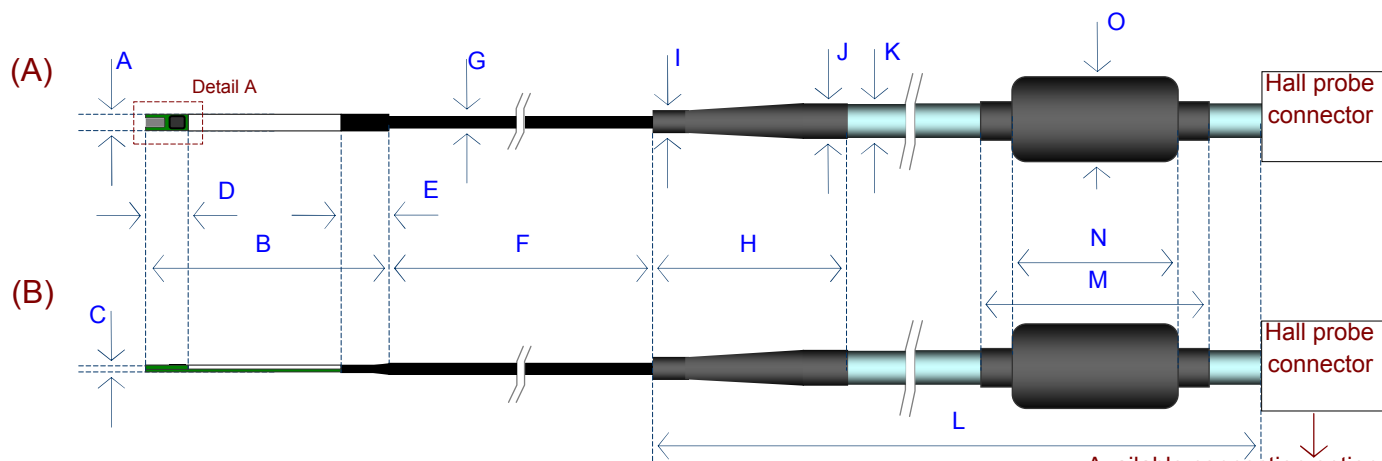PROBE DIMENSIONS AND CHARACTERISTICS:




Detail A 15:1

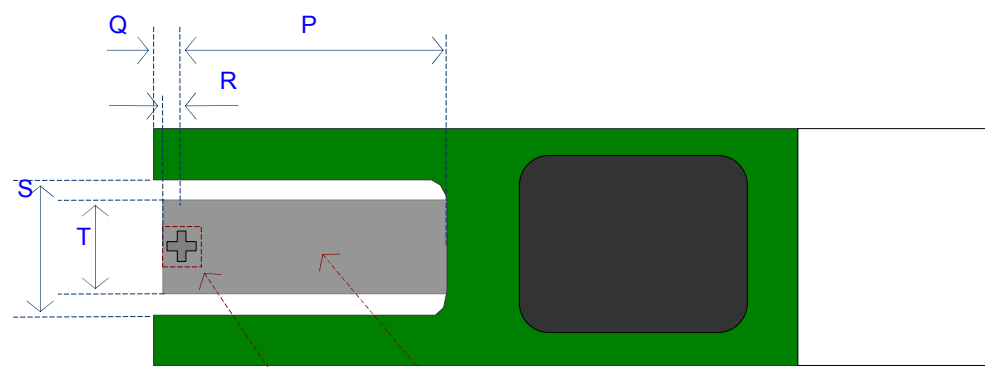

Silicon Hall sensor tip (2.70 x 0.64 x 0.28 mm)

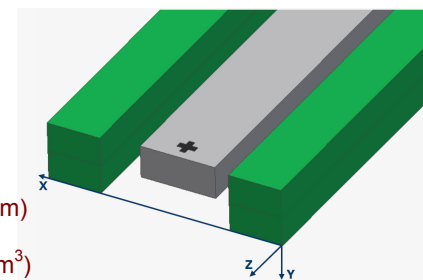Magnetic Field Sensitive Volume (0.15 x 0.01 x 0.15 mm<sup>3</sup>)




- Available connection options:
1. Probe-to-Electronic ADAPTER (SUB-D/25-pins female connector)
  2. LEMO plug
  3. Fixed connection (cable gland MS PG11)

Dimension	[mm]	Dimension	[mm]	Dimension	[mm]	Dimension	[mm]
A	2.0 ± 0.1	F	350 ± 5	K	Ø 4.8 ± 0.2	P	2.7 ± 0.1
B	47 ± 1	G	Ø 1.1 ± 0.2	L	2'000 ± 20	Q	0.35 ± 0.10
C	0.5 +0.1/-0.0	H	35 ± 3	M	50 ± 2	R	0.15
D	6.0 ± 0.1	I	Ø 3.4 ± 0.2	N	30 ± 1	S	1.1 ± 0.1
E	5.0 ± 0.5	J	Ø 5.7 ± 0.2	O	Ø 16 ± 1	T	0.64

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic field sensitive volume (MFSV)	0.15	0.01	0.15
Position of the center of MFSV (corresponding to MFSP, see Fig. 2)	1.0 ± 0.1	-0.4 ± 0.05	-0.35 ± 0.1
Total Probe external dimensions	2.0 ± 0.1	0.5 +0.1/-0.0	47 ± 1
Angular accuracy of the axes	± 1° with respect to the reference surface		
CaH Cable	Shielded, with a flexible thin part near the probe		
Total length of the CaH cable (dimension “L” in Fig. 2):	<div><div><div>• Standard: 2 m (Probe notation: 03K02)</div><div>• Optional: xx m (Probe notation: 03Kxx)</div></div><div>Note: Different lengths are available upon request.</div></div>		

**PROBE L DIMENSIONS AND CHARACTERISTICS:**

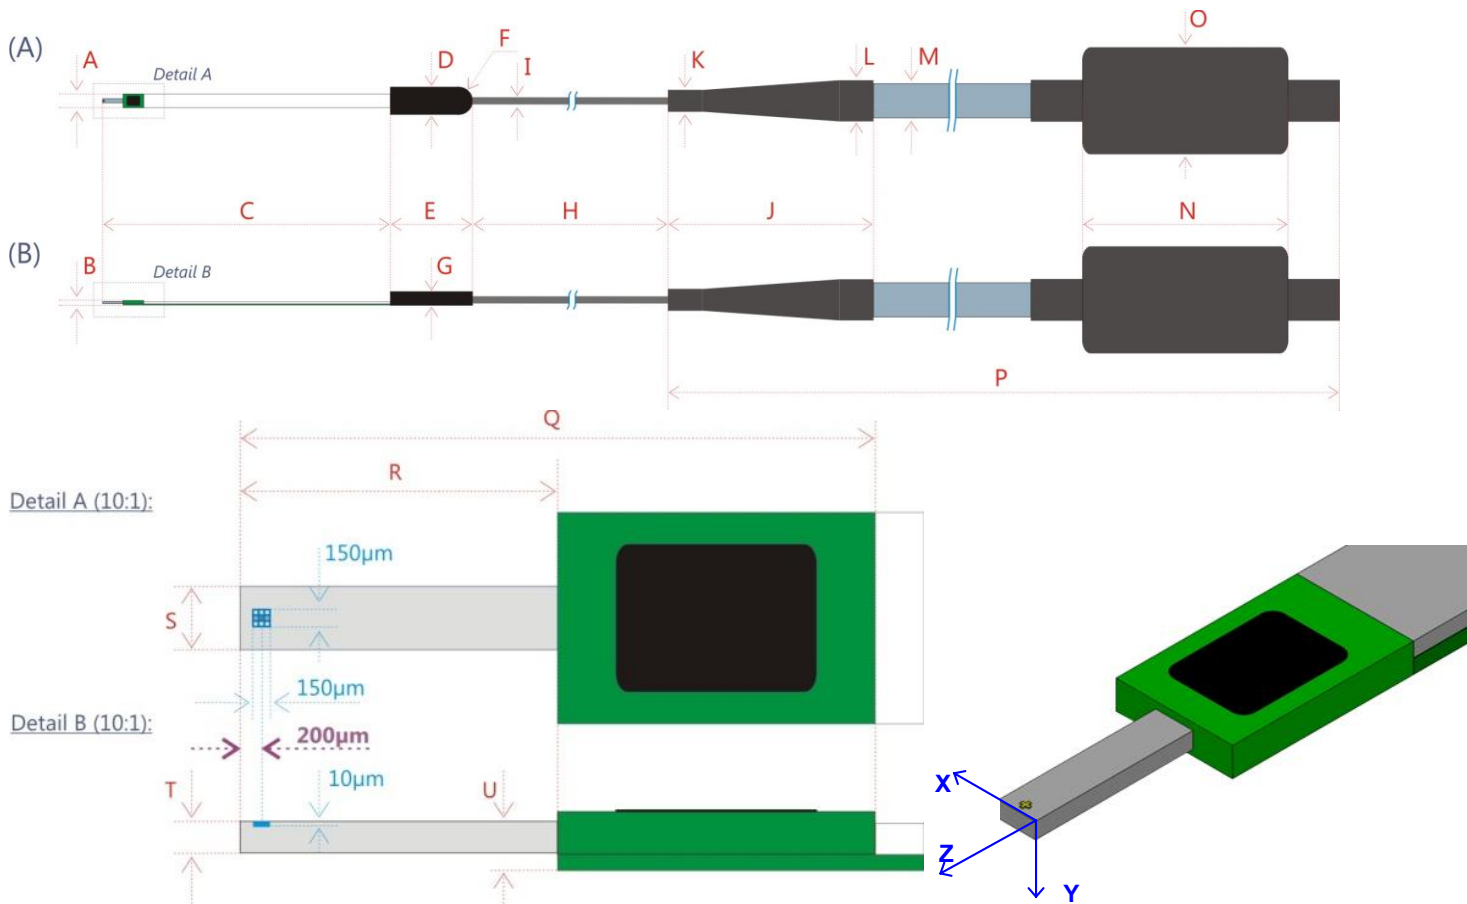

Hall Probe Dimension mm		Cable (CaH) Dimension mm		Hall sensor positioning Dimension	
A	2.0 +0.1/-0.0	H	50 ± 1	mmQ	5.8 ± 0.2
B	0.5 +0.1/-0.05	I	Ø1.1 ± 0.2	R	2.8 ± 0.2
C	42.3 ± 0.2 4.0	J	35 ± 3	S	0.64
D	± 0.1 12.0 ±	K	Ø3.3 ± 0.3	T	+0.02/-0.00
E	0.2 R2.0 ±	L	Ø5.8 ± 0.3	U	0.28
F	0.1 2.0 ± 0.1	M	Ø5.0 ± 0.2		
G		N	30 ± 1		
		O	Ø16.5 ± 0.5		
		P	X ± 1%(X)		

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic field sensitive volume (MFSV)	0.15	0.01	0.15
Position of the center of MFSV (corresponding to MFSP, see Fig.1 and	0.32 +0.01/-0.00	-0.01	-0.2 +0.03/-0.00
Total external dimensions of the Probe	<ul style="list-style-type: none"> <li>2.0 ± 0.1 Longer, thinner part</li> <li>4.0 ± 0.1 Shorter, thicker part of the probe</li> </ul>	<ul style="list-style-type: none"> <li>0.5 ± 0.1 Longer, thinner part</li> <li>2.0 ± 0.1 Shorter, thicker part of the probe</li> </ul>	<ul style="list-style-type: none"> <li>42.3 ± 0.2 Longer, thinner part</li> <li>12.0 ± 0.1 Shorter, thicker part of the probe</li> </ul>
Angular accuracy of the axes	±2° with respect to the reference surface, after calibration: ±0.1°		
CaH Cable	Shielded, with a flexible thin part near the probe		
Total length of the CaH cable:	<ul style="list-style-type: none"> <li>Standard: 2 m (Probe notation: <b>03L02</b>)</li> <li>Optional: xx m (Probe notation: <b>03Lxx</b>)</li> </ul>		

更多产品信息，详见<http://www.gaussmeter.com.cn> *Note: Different lengths are available upon request.*

**PROBE U AND CABLE DIMENSIONS AND CHARACTERISTICS**

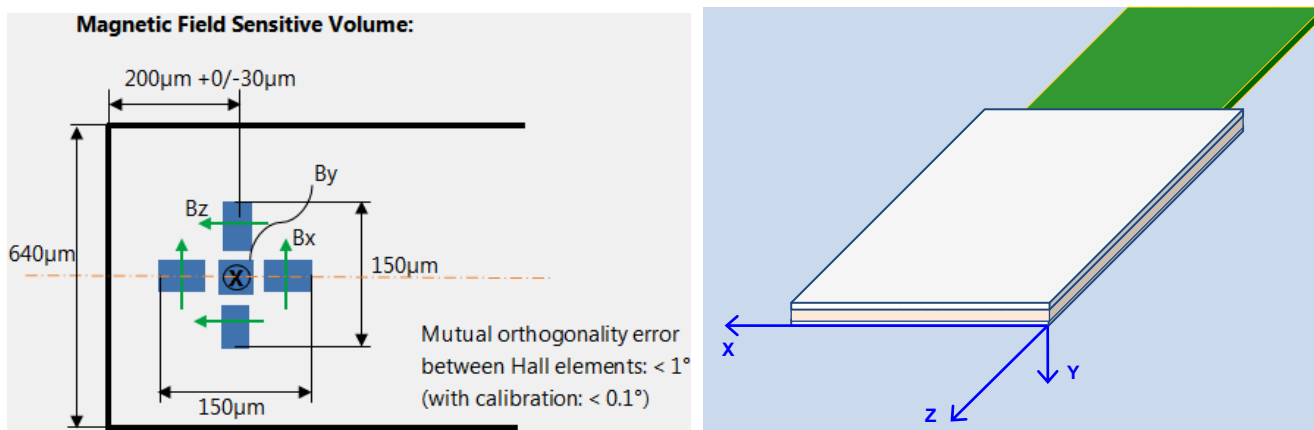
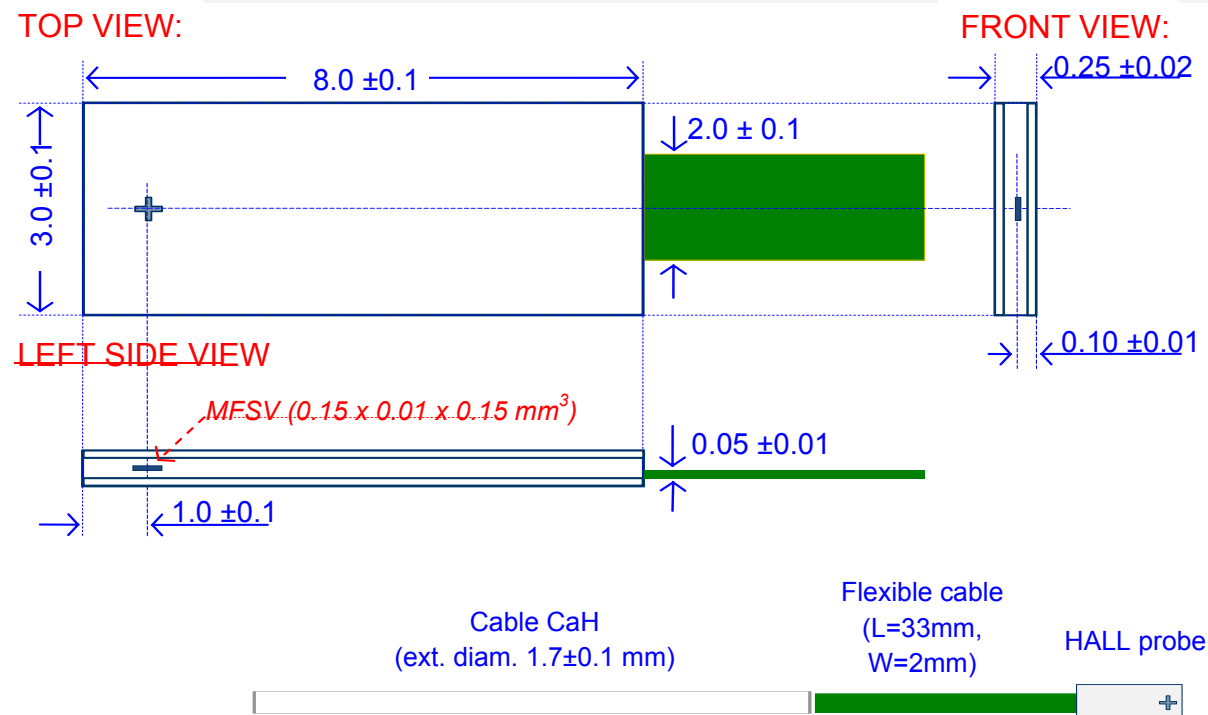


Figure 3. Left: Magnetic field sensitive volume of the applied integrated 3D Hall sensor;  
Right: Reference Cartesian coordinate system of the 03U Hall probe

Dimension	X [mm]	Y [mm]	Z [mm]
Magnetic field sensitive volume (MFSV)	0.15	0.01	0.15
Position of the center of MFSV (see Figures 2 and 3)	1.5 ±0.1	-0.10 ±0.01	-1.0 ±0.1
Total Probe external dimensions	3.0 ±0.1	0.25 ±0.02	8.0 ±0.1
Angular accuracy of the axes	< ±2° with respect to the reference surface better than ±0.1° after calibration		
Total length of the CaH cable:	<ul style="list-style-type: none"><li>Standard: 2 m (Probe notation: <b>F3A-03U02</b>)</li><li>Optional: XX m (Probe notation: <b>F3A-03UXX</b>)</li></ul> <p>NOTE: Various cable lengths are available upon request.</p>		

**MAGNETIC and ELECTRICAL SPECIFICATIONS:**

Unless otherwise noted, the given specifications apply for all three B-measurement channels B<sub>x</sub>, B<sub>y</sub>, and B<sub>z</sub> at room temperature (23°C) and after a device warm-up time of 15 minutes.

Parameter		Value				Remarks
Standard measurement ranges		± 20mT	± 0.2T	± 3T	± 20T	No saturation of the outputs; Other meas. ranges available
Linear range of magnetic flux density (± B <sub>LR</sub> )		± 20mT	± 0.2T	± 2T	± 2T	Optimal, fully calibrated meas. range
Total measuring Accuracy (@ B < ± B <sub>LR</sub> )	high	0.1%	0.1%	0.1%	0.5%	See note 1
	low	1.0%	1.0%	1.0%	0.5%	
Output voltages (V <sub>out</sub> )		differential				See note 2
Sensitivity to DC magnetic field (S)		500 V/T	50 V/T	5 V/T	0.5 V/T	Differential output; see note 3
Tolerance of sensitivity (S <sub>err</sub> ) (@ B < ± B <sub>LR</sub> )	high	0.03%	0.03%	0.03%	0.2%	see notes 3 and 4
	low	0.5%	0.5%	0.5%	0.2%	
Nonlinearity (NL) (@ B < ± B <sub>LR</sub> )	high	0.01%	0.05%	0.05%	0.2%	See note 4
	low	0.1%	0.1%	0.5%	0.2%	
Planar Hall voltage (V <sub>planar</sub> ) (@ B < ± B <sub>LR</sub> )		< 0.01 % of V <sub>normal</sub>				See note 5
Temperature coefficient of sensitivity		< ± 100 ppm/°C (± 0.01 %/°C)				@ Temperature range 23 °C ± 10 °C
Long-term instability of sensitivity		< 1% over 10 years				
Offset (@ B = 0T) (B <sub>offs</sub> )		< ±40 μT	< ±60 μT	< ±0.6 mT	< ±4 mT	@ Temperature range 23 °C ± 5 °C
Temperature coefficient of the offset		< ±2 μT/°C	< ±5 μT/°C	< ±50 μT/°C	< ±400 μT/°C	
Offset fluctuation and drift (Δt = 0.05s, t = 100s)		< 30 μT	< 40 μT	< 100 μT	< 700 μT	Peak-to-peak values; See note 6
Output noise						
Noise Spectral Density @ f = 1 Hz (NSD <sub>1</sub> )		1 μT/√Hz	2 μT/√Hz	7 μT/√Hz	40 μT/√Hz	Region of 1/f – noise
Corner frequency (f <sub>c</sub> )		10 Hz				Where 1/f noise = white noise
Noise Spectral Density @ f > 10 Hz (NSD <sub>w</sub> )		0.7 μT/√Hz	0.8 μT/√Hz	2 μT/√Hz	16 μT/√Hz	Region of white noise
Broad-band Noise (10 Hz to f <sub>T</sub> )		depends on the customer's specified frequency bandwidth				RMS noise; see note 7
Resolution						See notes 6 - 10
Typical frequency response						
Frequency Bandwidth [f <sub>T</sub> ]		0.5 kHz 2.5 kHz 10 kHz max 25 kHz	0.5 kHz 2.5 kHz 10 kHz max 25 kHz	0.5 kHz 2.5 kHz 10 kHz max 25 kHz	max 0.5 kHz	Other frequency bandwidths available; Sensitivity decrease -3dB; See note 11
Output resistance		< 10 Ohms, short circuit proof				
Temperature output						
Ground-referred voltage		V <sub>T</sub> [mV] = (T [°C] -23°C ± 1°C) x 500 [mV/°C] V <sub>T</sub> [mV] = (T [°C] -23°C ± 3°C) x 100 [mV/°C]				For temp. range: +5°C to +45°C For temp. range up to: +100°C

MODULE E: MECHANICAL AND ELECTRICAL SPECIFICATIONS:

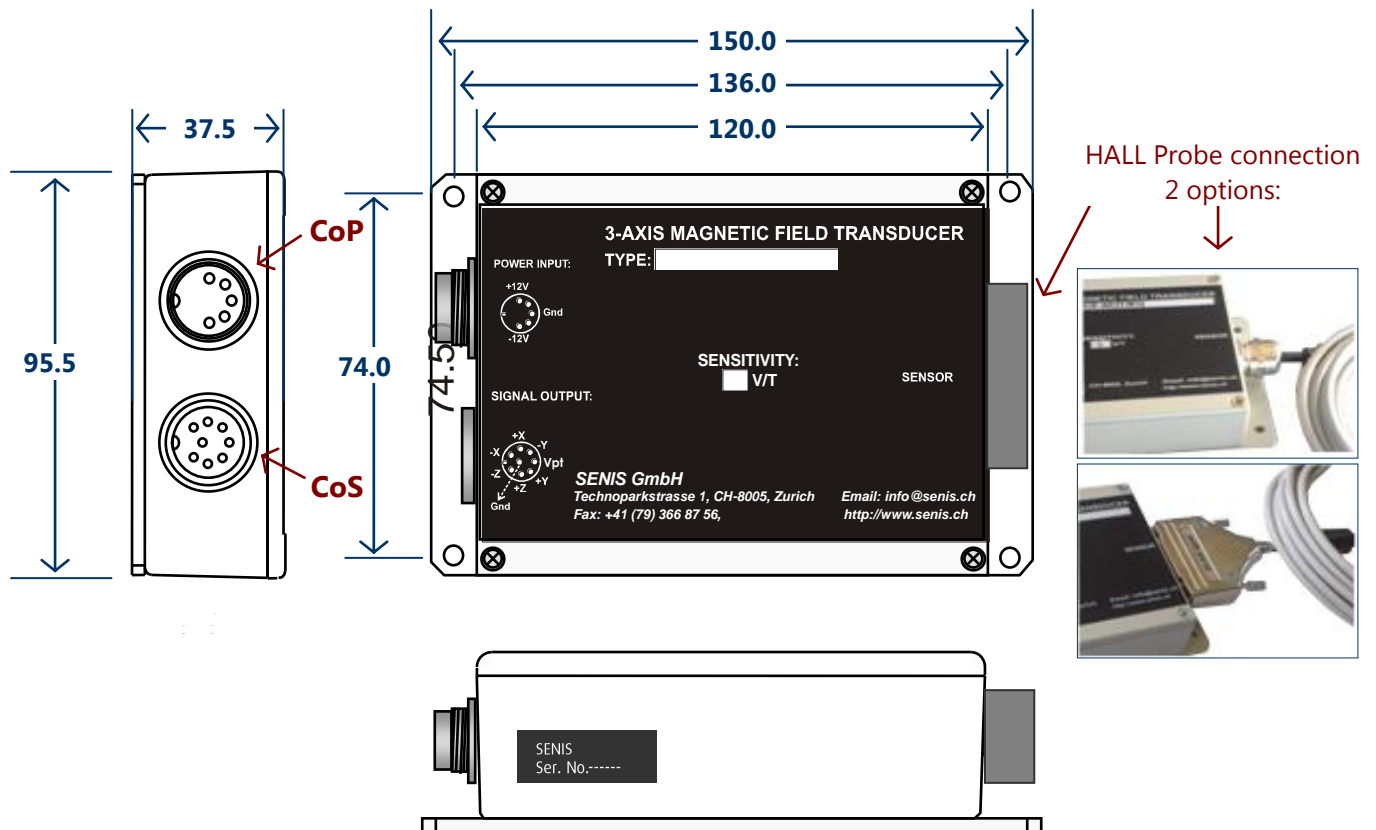


Figure 4. Structure, dimensions and tolerances of the 3-channel analogue electronic module

**Module E**

High mechanical strength, electrically shielded aluminum case [95 **W** x 120 **L** x 37 **H** mm] with mounting provision (see Fig. 4)

**Connector CoS**

DIN KVF81, 8 poles (Mating plug SV81)

Field signal X+, X-	Pins 1 and 6, respectively
Field signal Y+, Y-	Pins 5 and 4, respectively
Field signal Z+, Z-	Pins 3 and 7, respectively
Temperature signal	Pin 2
Signal common (GND)	Pin 8

**Connector CoP**

DIN SFV50, 5 poles (Mating plug KV50)

Power, +12V	Pin 3
Power, -12V	Pin 1
Power common (GND)	Pin 2

**Connector CaH (available options)**

- **Fixed connection:** Cable gland, MS PG11
- **Detachable connection:** Standard: D-SUB25, SOCKET, 25WAY

**Optional accessories [Details see the appendix]**

**DC Power**

Voltage:	±12V nominal, ±2%
Max. ripple:	100 mVpp
Current:	ca. ±100 mA

**Output Cable**

Connector:	SV81
Output Pins:	8
Cable Length:	could be customized by users

**Zero Chamber**

Ext. diameter:	26 ± 1.0 mm
Int. diameter:	21 ± 0.5mm
Length:	200 ± 1.0 mm

#### Environmental Parameters:

Operating Temperature	+5°C to +45°C	Option: up to +100°C for the H-Module
Storage Temperature	-20°C to +85°C	

#### Magnetic Flux Density (B) units (T-tesla, G-gauss) conversion:

- 1 T = 10 kG
- 1 mT = 10 G
- 1  $\mu$ T = 10 mG

#### OPTIONS:

##### DC Calibration

The calibration table of the transducer can be ordered as an option. The calibration table is an Excel-file, providing the actual values of the transducer output voltage for the test DC magnetic flux densities measured by a reference NMR Teslameter. The standard calibration table covers the linear range of magnetic flux density  $\pm B_{LR}$  in the steps of  $B_{LR}/10$ . Different calibration tables are available upon request. By the utilisation of the calibration table, the accuracy of DC and low-frequency magnetic measurement can be increased up to the limit given by the resolution (see Notes 1 and 6  $\div$  10).

##### AC Calibration - Frequency Response

Another option is the calibration table of the frequency response. This is an Excel file, providing the actual values of the transducer transfer function (complex sensitivity and Bode plots) for a reference AC magnetic flux density. The standard frequency response calibration table covers the transducer bandwidth, from DC to  $f_T$ , in the steps of  $f_T/10$ . Different calibration tables are also available upon request. Utilisation of the frequency calibration table allows an accuracy increase of the AC magnetic measurements almost up to the limit given by the resolution (see Notes 1 and 6  $\div$  11).

SENIS 3-Axis Hall probe works well in the B-frequency range from DC to  $f_T$  (-3dB point) (B being the density of the measured magnetic flux). In addition to the Hall voltage, at high B-frequencies also inductive signals are generated at the connection probe-thin cable. Moreover, the probe, the cable and the electronics in the E-module behave as a low-pass filter. As a result, the transducer has the "complex" sensitivity of the form:

$$S = S_H + jS_I$$

Here:

- $S_H$  represents sensitivity for the output signal in phase with the magnetic flux density (that is the real part of the transfer function);
- $S_I$  is the sensitivity with the 90° phase shift with respect to the magnetic flux density (i.e., the imaginary part of the transfer function).

Calibration data can be ordered for  $S_H$  and  $S_I$  for all three axes X, Y and Z (as an option). This allows the customer to deduce accurate values of the measured magnetic flux density at even high frequencies by an appropriate mathematical treatment of the transducer output voltage  $V_{out}$ .

## NOTES:

- 1) The **accuracy** of the transducer is defined as the maximum difference between the actual measured magnetic flux density and that given by the transducer. In other words, the term accuracy expresses the maximum measurement error. After zeroing the offset at the nominal temperature, the worst case relative measurement error of the transducer is given by the following expression:

$$\text{Max. Relative Error: M.R.E.} = S_{\text{err}} + NL + 100 \times \text{Res} / B_{\text{LR}} \quad [\text{unit: \% of } B_{\text{LR}}] \quad \text{Eq. [1]}$$

Here,  $S_{\text{err}}$  is the tolerance of the sensitivity (relative error in percents of  $S$ ),  $NL$  is the maximal relative nonlinearity error (see note 4),  $\text{Res}$  is the absolute resolution (Notes 6÷10) and  $B_{\text{LR}}$  is the linear range of magnetic flux density.

- 2) The output of the measurement channel has two terminals and the output signal is the (differential) voltage between these two terminals. However, each output terminal can be used also as a single-ended output relative to common signal. In this case the sensitivity is approx. 1/2 of that of the differential output (*Remark: The single-ended output is not calibrated*).
- 3) The **sensitivity** is given as the nominal slope of an ideal linear function  $V_{\text{out}} = f(B)$ , i.e.

$$V_{\text{out}} = S \times B \quad \text{Eq. [2]}$$

where  $V_{\text{out}}$ ,  $S$  and  $B$  represent transducer output voltage, sensitivity and the measured magnetic flux density, respectively.

- 4) The **nonlinearity** is the deviation of the function  $B_{\text{measured}} = f(B_{\text{actual}})$  from the best linear fit of this function. Usually, the maximum of this deviation is expressed in terms of percentage of the full-scale input. Accordingly, the nonlinearity error is calculated as follows:

$$NL = 100 \times \left| \frac{V_{\text{out}} - V_{\text{off}}}{S'} - B \right|_{\text{max}} / B_{\text{LR}} \quad (\text{for } -B_{\text{LR}} < B < B_{\text{LR}}) \quad \text{Eq. [3]}$$

Notation:

$B$  = Actual testing DC magnetic flux density given by a reference NMR Teslameter

$V_{\text{out}}(B) - V_{\text{off}}$  = Corresponding measured transducer output voltage after zeroing the Offset

$S'$  = Slope of the best linear fit of the function  $f(B) = V_{\text{out}}(B) - V_{\text{off}}$  (i.e. the actual sensitivity)

$B_{\text{LR}}$  = Linear range of magnetic flux density

**Tolerance of sensitivity** can be calculated as follows:

$$\text{Tolerance of sensitivity} = 100 \times |S' - S| / S \quad \text{Eq. [4]}$$

- 5) The **planar Hall voltage** is the voltage at the output of a Hall transducer produced by a magnetic flux density vector co-planar with the Hall plate. The planar Hall voltage is approximately proportional to the square of the measured magnetic flux density. Therefore, for example:

$$\frac{V_{\text{planar}}}{V_{\text{normal}}} \Big|_{@ B} = 4 \cdot \frac{V_{\text{planar}}}{V_{\text{normal}}} \Big|_{@ B/2} \quad \text{Eq. [5]}$$

Here,  $V_{\text{normal}}$  denotes the normal Hall voltage, i.e., the transducer output voltage when the magnetic field is perpendicular to the Hall plate.

- 6) This is the “6-sigma” peak-to-peak span of offset fluctuations with sampling time  $\Delta t=0.05s$  and total measurement time  $t=100s$ . The measurement conditions correspond to the frequency bandwidth from 0.01Hz to 10Hz. The “6-sigma” means that in average 0.27% of the measurement time offset will exceed the given peak-to-peak span. The corresponding root mean square (RMS) noise equals 1/6 of “Offset fluctuation & drift”.
- 7) Total output RMS noise voltage (of all frequencies) of the transducer. The corresponding peak-to-peak noise is about 6 times the RMS noise. See also Notes 8 and 9.
- 8) Maximal signal bandwidth of the transducer, determined by a built-in low-pass filter with a cut-off frequency  $f_T$ . In order to decrease noise or avoid aliasing, the frequency bandwidth may be limited by passing the transducer output signal through an external filter (see Notes 9 and 10).
- 9) **Resolution** of the transducer is the smallest detectable change of the magnetic flux density that can be revealed by the output signal. The resolution is limited by the noise of the transducer and depends on the frequency band of interest.

The **DC resolution** is given by the specification “Offset fluctuation & drift” (see also Note 6). The worst-case (**AC resolution**) is given by the specification “Broad-band noise” (see also Note 7). The resolution of a measurement can be increased by limiting the frequency bandwidth of the transducer. This can be done by passing the transducer output signal through a hardware filter or by averaging the measured values. (Caution: filtering produces a phase shift, and averaging a time delay!) The RMS noise voltage (i.e. resolution) of the transducer in a frequency band from  $f_L$  to  $f_H$  can be estimated as follows:

$$V_{nRMS-B} \approx \sqrt{NSD_{1f}^2 \times 1Hz \times \ln\left(\frac{f_H}{f_L}\right) + 1.57 \times NSD_W \times f_H} \quad \text{Eq. [6]}$$

Here  $NSD_{1f}$  is the  $1/f$  noise voltage spectral density (RMS) at  $f=1Hz$ ;  $NSD_W$  is the RMS white noise voltage spectral density;  $f_L$  is the low, and  $f_H$  is the high-frequency limit of the bandwidth of interest; and the numerical factor 1.57 comes under the assumption of using a first-order low-pass filter. For a DC measurement:  $f_L=1/\text{measurement time}$ . The high-frequency limit can not be higher than the cut-off frequency of the built-in filter  $f_T$ :  $f_H \leq f_T$ . If the low-frequency limit  $f_L$  is higher than the corner frequency  $f_C$ , then the first term in Eq. (6) can be neglected; otherwise: if the high-frequency limit  $f_H$  is lower than the corner frequency  $f_C$ , then the second term in Eq. (6) can be neglected. The corresponding peak-to-peak noise voltage can be calculated according to the “6-sigma” rule, i. e.,  $V_{nP-P-B} \approx 6 \times V_{nRMS-B}$ .

- 10) According to the sampling theorem, the sampling frequency must be at least two times higher than the highest frequency of the measured magnetic signal. Let us denote this signal sampling frequency by  $f_{samS}$ . However, in order to obtain the best signal-to-noise ratio, it is useful to allow for over-sampling (this way we avoid aliasing of high-frequency noise). Accordingly, for best resolution, the recommended physical sampling frequency of the transducer output voltage is  $f_{samP} > 5 \times f_T$  (or  $f_{samP} > 5 \times f_H$ ), if an additional low-pass filter is used (see Note 8). The number of samples can be reduced by averaging every  $N$  subsequent samples,  $N \leq f_{samP} / f_{samS}$ .
- 11) When measuring fast-changing magnetic fields, one should take into account the transport delay of the Hall signals, small inductive signals generated at the connections Hall probe–thin cable, and the filter effect of the electronics in the E-Module. Approximately, the transducer transfer function is similar to that of a third-order Butterworth low-pass filter, with the bandwidth from DC to  $f_T$ . The filter attenuation is -60db/dec. (-18db/oct.). The calibration table of the frequency response is available as an option.